

# WAM-X10+

## Wireless Activity Monitor

2G/3G/4G/5G  
Signal Detection  
with Worldwide  
Coverage

2.4GHz/5GHz/6GHz  
Wi-Fi/Bluetooth  
Detection

Wideband  
0-14 GHz  
Detection

Satellite Phone  
Detection





## FEATURES

- Detects 2G/3G/4G and the latest 5G devices - plus Wi-Fi/Bluetooth/2.4GHz and 5GHz Devices
- Detects Mobile Phones, Smartphones, GPS Trackers, SMS (Texts), GSM Bugs, 3G/4G/5G Video, Bluetooth & Wi-Fi Devices, Store & Forward devices
- Worldwide Cellular Coverage - Simply select the relevant region
- Separate Wideband RF Detector 0-14 GHz with Frequency Counter (up to 6 GHz)
- Satellite Phone Detection (1.6GHz L-Band)
- Separate 2.4 GHz & 5 GHz band detector for Wi-Fi/Bluetooth/Video and other latest generation devices
- Increased Sensitivity across all bands - Detects signals from up to 50 metres
- Event Log records Time/Date, Band, Duration & Signal Strength of up to 4000 Events
- Log can be viewed on screen and downloaded to USB stick for storage/viewing on a computer
- Graph Mode plots real time or historical graph of all detected signals
- 3.5-inch Colour TFT Display with easy-to-use menu driven operation
- Adjustable hinged antennas
- Audible Signal Strength 'Beep' and Silent Vibrate Mode
- Machined Aluminium Enclosure for maximum durability
- Supplied in Heavy Duty Military Standard Carry Case

The **WAM-X10+ Wireless Activity Monitor** is a portable multiband Radio Frequency (RF) detector for handheld use. It is designed for detection and logging transmissions from all types of radio frequency devices including mobile phones, smartphones, vehicle trackers, Wi-Fi Hotspots, GSM listening devices (bugs) and covert wireless 3G/4G/5G cameras. The WAM-X10+ provides complete coverage and logging of all activity in the surrounding area.



### Worldwide Cellular Band Detection

A complete ground-up redesign means the WAM-X10+ now has Worldwide 5G Cellular coverage. It can be used in any environment where Radio Frequency/Cellular devices are forbidden such as sensitive meeting rooms to check for hidden devices, unauthorised mobile phone usage in offices, exam halls, hospitals, or prisons and in vehicles to locate the latest hidden tracking devices. Satellite Phones operating in L-band can now also be detected.

### 2.4GHz, 5GHz & 6GHz Wi-Fi Detection

The WAM-X10+ also has a separate 2.4GHz, 5GHz band and a new 6GHz band detector for the rapidly growing threat

from Wi-Fi/Bluetooth, Store & Forward and Video devices.

### Wideband Detection

The 0-14 GHz Wideband detector provides the highest range of coverage of all RF activity in the target area. The frequency of the detected signal (up to 6GHz) can be seen simultaneously and the 'Livescan'


software shows the detected live signal pattern graphically to help identify the signal type. This can be particularly useful when searching for pulsing or burst devices such as GPS trackers.

Up to 4000 events can be stored within the WAM-X10+ for viewing as a list or graphically. For each detected signal (no matter how long or short) it will record the Time/Date, Duration, Band detected and Signal strength. This can be particularly useful in identifying the type of device that is being detected. For example: a string of regular short bursts in one band may represent those from a GSM/GPS Tracking device. These could be clearly viewed in Graph Mode as lines of regular spacing representing the pulsing nature of the transmission. Also, by looking at call activity at certain times of the day could help identify unauthorised phone use in sensitive areas such as prisons, company board rooms, exam halls, etc. The entire event log can also be downloaded to a USB stick for storage or transfer to a computer where it can be viewed/sorted for analysis or reporting.

For truly global use, simply select the international region the device is being used in and the WAM-X10+ will detect signals from all the relevant cellular bands. This means the WAM-X10+ is ready for the rollout of the latest 5G devices, worldwide. Of course, all existing 2G, 3G and 4G bands will also be covered. Satellite phones using L-Band (1.6GHz) will also be detected.

The WAM-X10+ features 2.4GHz , 5GHz & New 6GHz Wireless real time detection for the threat from the latest generation of Bluetooth & Wi-Fi devices. Such devices can for example, record audio over long periods and then transmit it in short regular bursts. It will also detect other devices that use these bands such as wireless video. Complex algorithms analyse the detected signals to help identify the signal type i.e., Bluetooth, Wi-Fi, or other 2.4 GHz, 5GHz or 6GHz signal. All activity can be viewed graphically for further analysis.


A new powerful high-gain RF front end ensures detection up to 50 meters depending on signal strength and ambient conditions. The WAM-X10+ is supplied with new adjustable hinged antennas designed for optimum performance and flexibility.

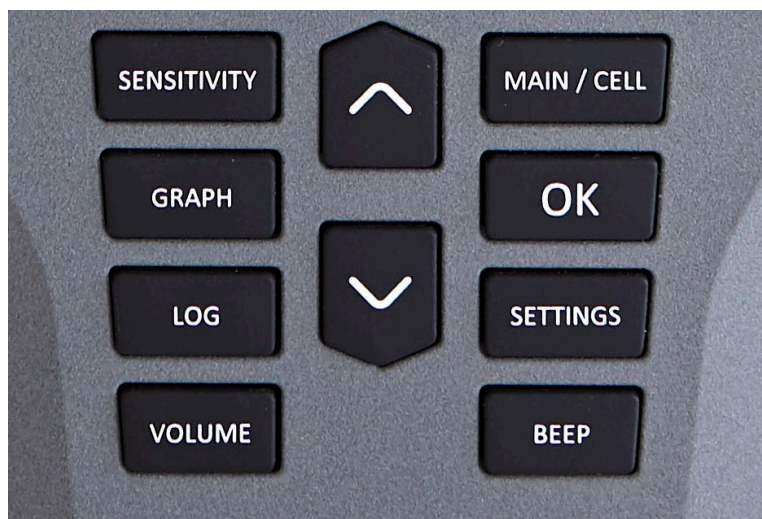


A new keypad design means operation is simple and intuitive. All information is displayed on a colour TFT screen that allows the user to perform real time detection or to view events that have previously occurred. Each band has an individual 20 element signal strength meter enabling the precise source of a detected signal to be located with ease. An audible 'Beep' mode allows the user to monitor without looking at the display and a silent Vibrate mode can also be used for particularly sensitive areas.

**The WAM-X10+ is designed and manufactured**

**in the UK** to the highest specification and is enclosed in customised machined aircraft-grade aluminium enclosure. It uses an integral Lithium-Polymer battery pack and is supplied with an international charger. The complete system is supplied in a compact heavy-duty military standard carry case for ultimate protection.

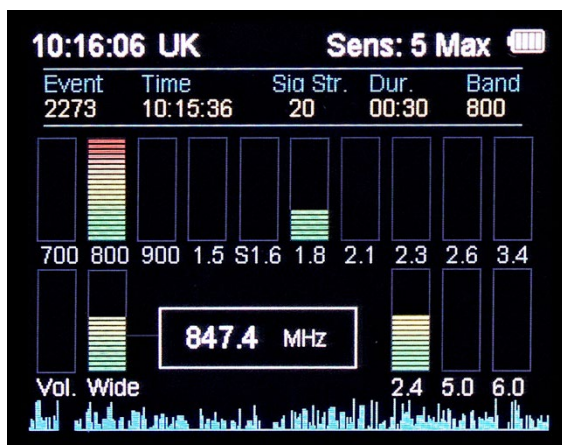

Main screen showing live detected signals

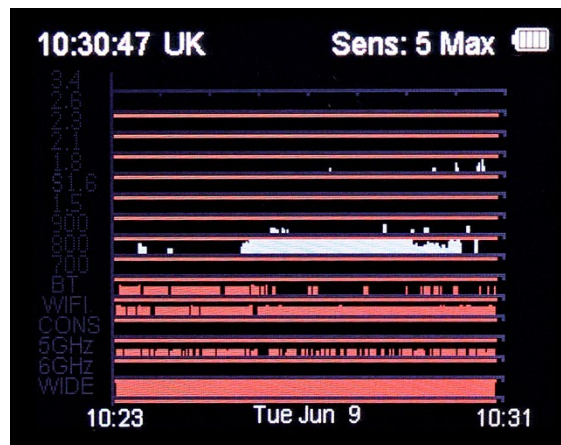


Live Graph Mode signals over 8 Minutes




10:19:49 UK

| Event | Date     | Time     | Sig Str. | Dur.  | Band |
|-------|----------|----------|----------|-------|------|
| 2302  | 09/06/26 | 10:18:30 | 4        | 00:04 | 900  |
| 2301  | 01/06/26 | 10:20:24 | 11       | 00:18 | 2.4  |
| 2300  | 01/06/26 | 10:20:04 | 2        | 00:12 | 5.0  |
| 2299  | 01/06/26 | 10:20:04 | 11       | 00:19 | 2.4  |
| 2298  | 01/06/26 | 10:19:43 | 1        | 00:02 | 6.0  |
| 2297  | 09/06/26 | 10:18:30 | 2        | 00:11 | 1.8  |
| 2296  | 01/06/26 | 10:19:43 | 11       | 00:17 | 2.4  |
| 2295  | 01/06/26 | 10:19:23 | 1        | 00:01 | 6.0  |

Log Event List

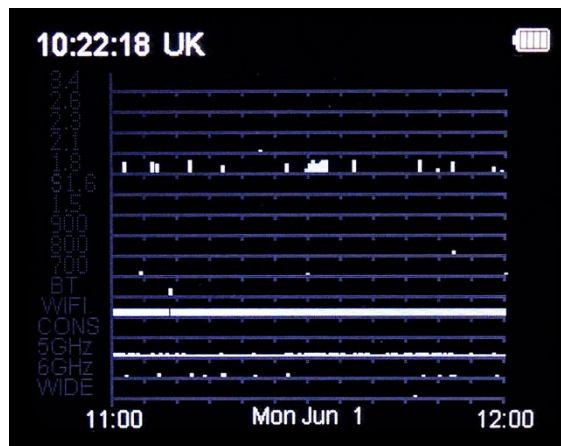

Log Graph over 60 minutes

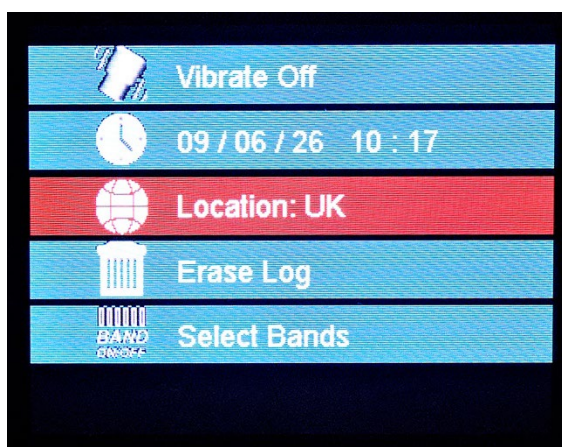

Settings Menu



USB Stick Socket for Event Log download

## SUPPLIED IN PACKAGE

WAM-X10+ - Main Unit

Adjustable hinged antenna x 2 + Low Frequency hinged antenna (0-800 MHz)

Directional Antenna LPA-14-SMA (Blue)

5V USB-C Charger - 110V to 240V AC input (Auto Switching) with International Adaptors

Earphones

USB Memory Stick

High Protection Military Standard Carry Case



**TECHNICAL SPECIFICATION**

Typical Performance Characteristics - at 20 degrees C

|                                |                                                                                                     |
|--------------------------------|-----------------------------------------------------------------------------------------------------|
| Wideband Frequency Range       | 10MHz – 14000MHz (14.0GHz)                                                                          |
| Cellular Regions covered       | UK, EUROPE, ASIA, AFRICA, NORTH AMERICA, SOUTH AMERICA, AUSTRALIA                                   |
| Cellular Frequency Range       | International bands - (300 MHz to 6 GHz) – Maximum 10 viewable bands - Sensitivity -70 dBm Max      |
| Satellite Phone Band           | L-Band - 1.6GHz                                                                                     |
| 2.4, 5 & 6 GHz Frequency Range | 2400 to 2485MHz & 4900 to 5950MHz, 5925 to 7125 MHz                                                 |
| Display                        | TFT Colour 3.5" High Contrast Graphic Display                                                       |
| Battery                        | Internal Lithium-Polymer rechargeable<br>Operating duration – fully charged battery – up to 8 hours |
| Charging                       | USB-C socket - Charge Time ~ 4 hours                                                                |
| Operating Temperature Range    | -15 to +50 degrees C - Relative Humidity < 90%                                                      |
| Dimensions                     | 173 mm x 103 mm x 28 mm                                                                             |
| Weight                         | Main Unit – 500g<br>Carry Case Complete – 2.4 Kg                                                    |
| Signal Processing and Control  | RISC Based Microcontroller with real time clock                                                     |
| Event Logs                     | Maximum 4,000 RF Events                                                                             |
| USB Socket                     | For USB Stick download only                                                                         |

MADE IN ENGLAND

Copyright 2023 JJN Electronics Ltd

